

# Data Sheet

## NEX-1PRG212



Pressure Reducing Valve 15mm



### Materials


Body	DZR Brass
Connection	15mm

### Specifications

Upstream pressure	16 bar
Downstream pressure range	1 ~ 6 bar
Factory setting	3 bar
Max Temp	60'c
Pressure gauge connection	1/4" F
Medium	Water

### Dimensions

Height	95
Width	107
Weight	460 grms
Bulk quantity	24

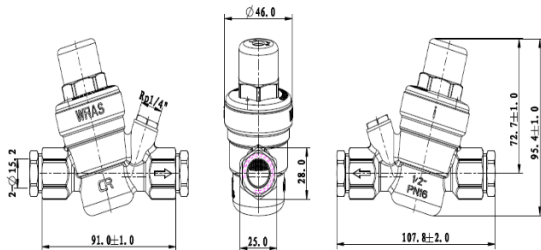

### Intended Use

PRV's are installed in residential water supply systems to reduce and stabilize the inlet mains water. The inlet mains water pressure can vary and needs to be stabilized for equipment within the property to no be damaged.

This series was designed for residential and light commercial applications, such as houses and apartments as well as water storage heaters and calorifiers.

Easy adjustment via hand turn, top screw. Pressure tapping point is also available for a pressure gauge.



Next Day Plumbing Supplies Ltd  
Registered office : 23 Beaumont Gardens : Poulton-Le-Fylde : England : FY6 7NX

[www.nextdayplumbingsupplies.com](http://www.nextdayplumbingsupplies.com) : [info@nextdayplumbingsupplies.com](mailto:info@nextdayplumbingsupplies.com)