

Data Sheet

NEX-1PRG215



Pressure Reducing Valve 22mm



Materials


Body	DZR Brass
Connection	22mm

Specifications

Upstream pressure	16 bar
Downstream pressure range	1 ~ 6 bar
Factory setting	3 bar
Max Temp	60'c
Pressure gauge connection	¼" F
Medium	Water

Dimensions

Height	95
Width	118
Weight	560 grms
Bulk quantity	24

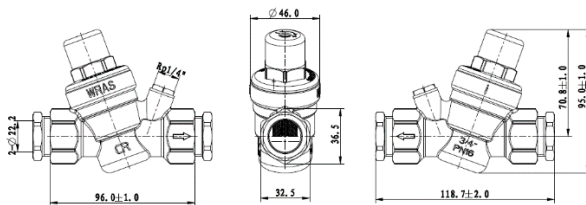

Intended Use

PRV's are installed in residential water supply systems to reduce and stabilize the inlet mains water. The inlet mains water pressure can vary and needs to be stabilized for equipment within the property to no be damaged.

This series was designed for residential and light commercial applications, such as houses and apartments as well as water storage heaters and calorifiers.

Easy adjustment via hand turn, top screw. Pressure tapping point is also available for a pressure gauge.



Next Day Plumbing Supplies Ltd
Registered office : 23 Beaumont Gardens : Poulton-Le-Fylde : England : FY6 7NX

www.nextdayplumbingsupplies.com : info@nextdayplumbingsupplies.com